
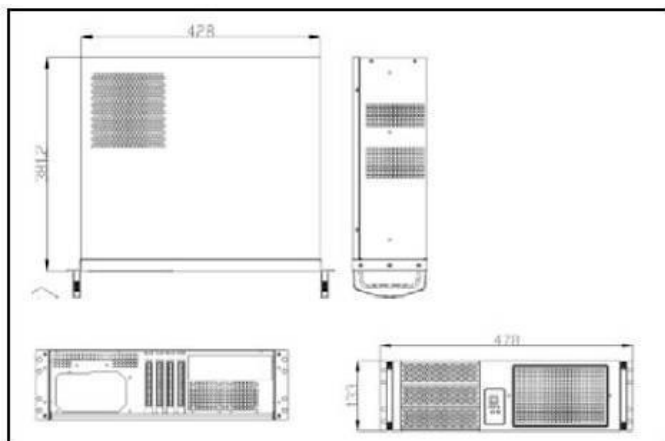


3RU RM3-338 – Short Depth System

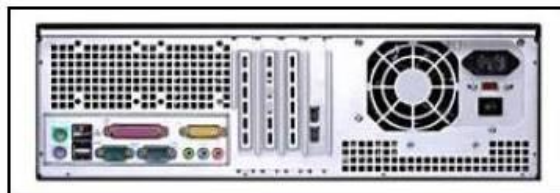

Short Depth System

Chassis		Mechanical	
Chassis	3RU Chassis – Black Fans : 2 off 80*80mm front fans Open bays : 3x 5.25" Lockable Hot swappable HDD/SSD bay Slide Rail option	Housing	(HxWxD) 133x478x382 mm
Mainboard		I/O Interface	
Chipset	uATX (micro-ATX) or ATX – Intel B75 Chipset	USB Ports	Front : 2 off USB 2.0 ports
CPU	Intel CPU - 2 nd & 3 rd Generation i3, i5, i7 series		
	CPU - Intel i5-3470S 2.9Ghz Quad Core, 4 Threads		
	6mb cache Low Power		
	Built-in Intel Integrated Graphics Processor (IGP)		
HDD	4Gig DDRIII		
	3 x Removable 500gig SATA 7200rpm HDD (2 set up in a RAID1)		
Onboard Video	DVI & VGA (up to 1920x1200 multi screen)		
Memory	Maximum 32gig DDRIII memory		
LAN	1 x Intel 1Gig LAN		
Operating Temp	~60 degrees C		
Power Supply		Expansion Slot	
Power Supply	110~240v AC auto ranging	PCI Slot	Rear slots : 4x full height, ¾ length Slots : 1xPCIe x16, 1xPCIe x4 (in x16 slot), 1xPCIe x1, 1xPCI Ports : USB2.0 and 3.0, 2*RS-232, Audio
		Sold and serviced by	
		 Suite 603, Level 5 152 Bunnerong Road PAGEWOOD NSW, 2035 Tel: 02 9314 2092 Email: sales@icpglobal.com.au	