
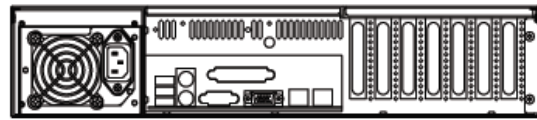


ICP-RM2-220 - 2RU Rack – Full Hot Swap Redundant System with onboard Audio & Video

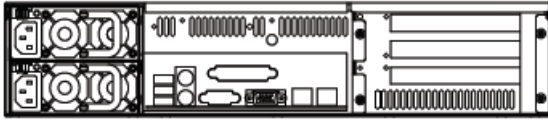

2RU Rack – Full Hot Swap Redundant System with onboard Audio & Video

TECHNICAL SPECIFICATIONS

Display		Mechanical	
Display	DVI-I (DVI-D & VGA), HDMI, Display Port (run dual screen)	Housing	(HxWxD) 88x427x570mm Slide Rails Included
Mainboard		Operating System	
Chipset	Intel Motherboard H77 (Gen2 & Gen3 CPUs)	Operating System	OEM MS Windows 7 32 or 64 bit Licensed
CPU	Intel i5-2500 3.3Ghz 4 Cores 4 Threads 6MB Cache		
	Options:		
	CPU - Generation 2 & 3 Series : i3, i5 & i7		
HDD	Integrated Intel GPU HD2000		
	2 x 4Gig DDR3 SDRAM 1333Mhz (32Gig total)		
	2 x Hot Swap 500gig SATA 7200rpm HDD in a RAID1 or 0		
	Intel Rapid Storage RAID 0,1,5,10		
	DVD+/RW SATA		
	Options:		
	RAID 0, 1, 5		
	Hardware RAID Card – Adaptec		
HD Audio	HD Audio - 7.1		
I/O Interface		Expansion Slot	
USB Port	Rear UBS Ports : 4 x USB2.0, 2 x USB3.0 Front USB Ports : 2 x USB2.0	PCI Slot	Full Height and Length Expansion Slots: 1 x PCIe x 16, or 1 x PCIe x 1 via riser. Or Half Height and Full Length Expansion Slots: 1 x PCIe x 16, 1 x PCIe x 1, 1 x PCIe x 4, 3 x PCI.
Power Supply		Ethernet Network	
Power Supply	500/500watt 80 Plus Hot Swap Power Supply	Network	Intel Ethernet LAN 10/100/1000
Sold and serviced by			
		 Suite 603, Level 5 152 Bunnerong Road PAGEWOOD NSW, 2035 Tel: 02 9314 2092 Email: sales@icpglobal.com.au	