
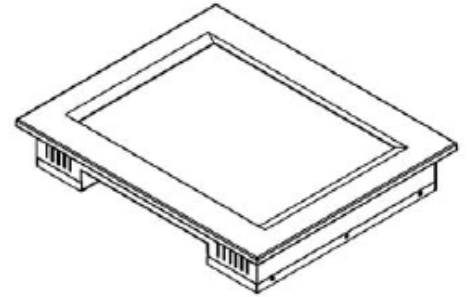


LCM-150

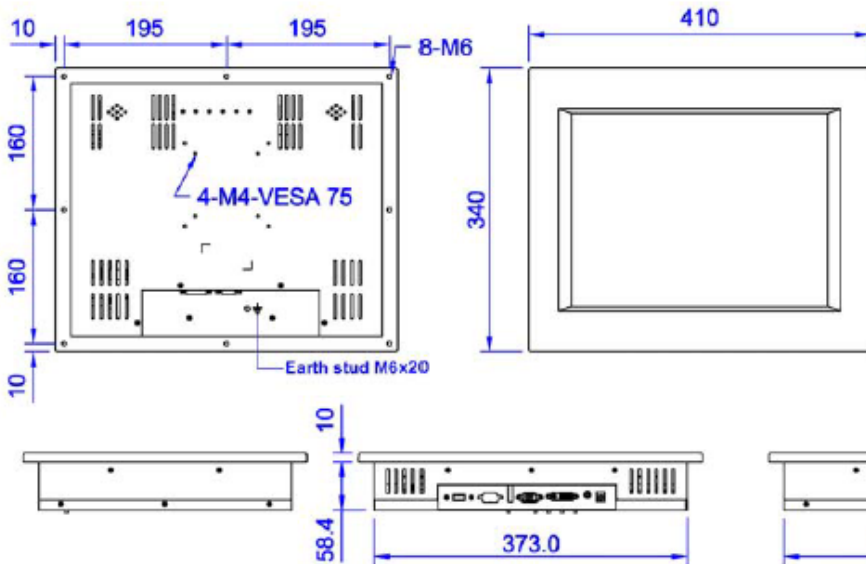

Industrial/Military-grade 15" Panel Monitor, Touchscreen Option,

TECHNICAL SPECIFICATIONS

LCD Display Grade

LCD Panel	15" TFT LCD color display. Stainless steel bezel.
Resolution	1024 x 768 XGA resolution.
Luminance	450-550 cd/m ² (Brightness of LCD)
Contrast ratio	300:1 – Optional: 450:1

Interface (VGA, DVI, BNC, Touch)

VGA	Standard 15-pin female D-sub RGB connector.
DVI	DVI Interface.
Video port	BNC video port (optional).
Touch interface	Serial port or USB port (optional).

Touch Screen: Optional

Touch Screen	5-Wire long life analog resistive touch screen.
Resolution	4096 x 4096 high resolution.

Mounting Method

Wall Mount	Support VESA-75/100 wall mount standards.
------------	---

OSD control buttons

Control buttons	On screen display buttons and On/Off power switch are located at the rear side of the housing. These OSD buttons control screen position up, down, left, right, brightness, contrast ratio and menu.
-----------------	--

Power Supply

Power Source	Support 100-240V AC auto power range Optional: DC 9-36V
Consumption	Max 40 watts, standby 5 watts

IP Rating

IP Rating	IP-65 and NEMA-4 water and dust resistant rating.
-----------	---

Environmental

Operate Temp	Industrial grade: 0 to 50°C Option: Military grade: -20 ~ 70°C
Shock	Meet MIL-STD-810F shock standard.
Vibration	Meet MIL-STD-810F vibration standard.

Sold and serviced by



Suite 603, Level 5
152 Bunnerong Road
PAGEWOOD
NSW, 2035
Tel: 02 9314 2092 Email: sales@icpglobal.com.au